

Pressurized Double Cylinder Soft Serve Freezer


U421



- Adjustable dispensing rate meets the requirements of high volume operations
- Refrigerated mix storage cabinet holds two 8-gallon mix containers for use with and without bag connection system
- Mix pumps inject the exact amount of air into your mix, maintaining overrun to ensure maximum profitability.
- Electronic control ensures peak efficiency and uniform product consistency
- Forced refrigeration switch to meet peak serving period demands
- Bottom sealing spigots eliminate waste and offer precise dispensing control
- Mix-low system to alert you of low mix conditions
- Self-sharpening, nonmetallic auger flights for reliable service



AIR AND WATER-COOLED MODELS

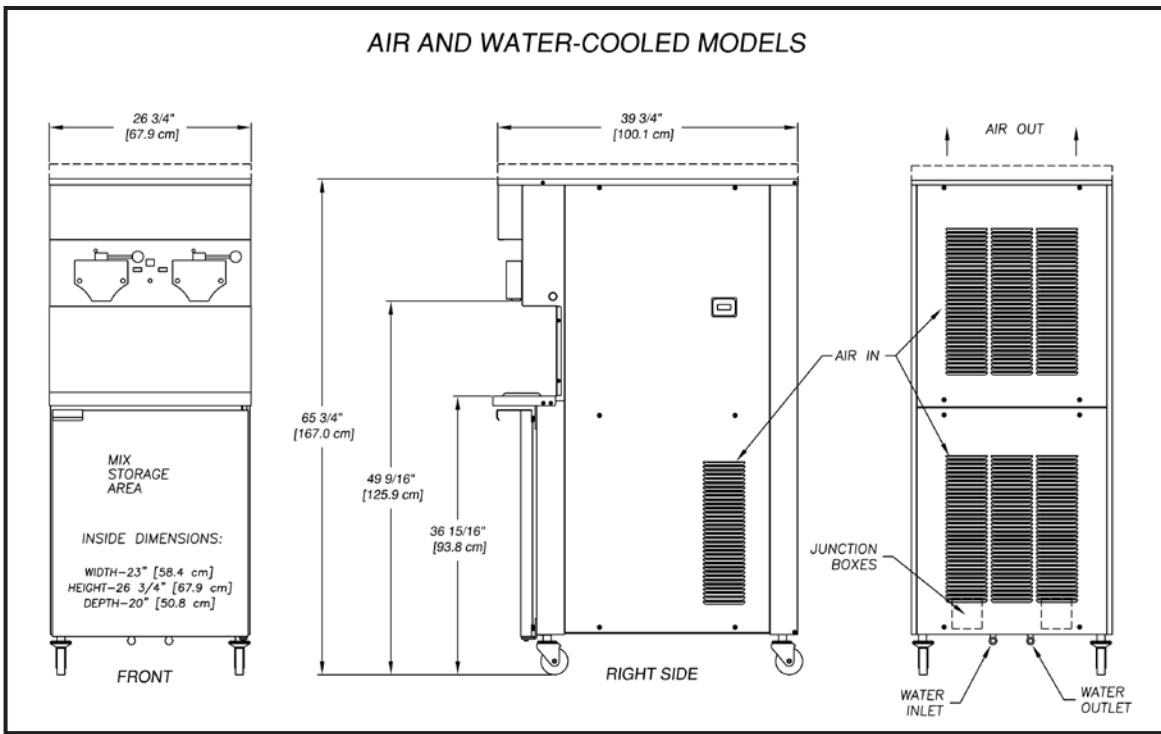

Dimensions	U421 Water Cooled		U421 Air Cooled				U421 Remote Air Cooled	
	Freezer	with crate	Freezer	with crate	Freezer	with crate	Freezer	with crate
width	26-3/4" (67,9 cm)	34" (86,4 cm)	26-3/4" (67,9 cm)	34" (86,4 cm)	26-3/4" (67,9 cm)	34" (86,4 cm)	26-3/4" (67,9 cm)	34" (86,4 cm)
height	65-3/4" (167,0 cm)	78" (198,1 cm)	67-3/4" (172,1 cm)	78" (198,1 cm)	67-3/4" (172,1 cm)	78" (198,1 cm)	67-3/4" (172,1 cm)	78" (198,1 cm)
depth	39-3/4" (101,0 cm)	48" (121,9 cm)	39-3/4" (101,0 cm)	48" (121,9 cm)	39-3/4" (101,0 cm)	48" (121,9 cm)	39-3/4" (101,0 cm)	48" (121,9 cm)
Weight	760 lbs (344,7 kg)	908 lbs (411,8 kg)	785 lbs (356,0 kg)	935 lbs (424,1 kg)	760 lbs (344,7 kg)	908 lbs (411,8 kg)	760 lbs (344,7 kg)	908 lbs (411,8 kg)
*Electrical	1 PH		3 PH		1 PH		3 PH	
minimum circuit ampacity	left	right	left	right	left	right	left	right
maximum overcurrent protection device	31A	31A	21A	21A	36A	31A	26A	21A
International Option	1 Phase, 220-240 VAC, 50Hz or 3 Phase, 380-415 VAC, 50Hz							
Compressor	Two - 18,000 Btu/hr							
Drive Motor	Two - 2 hp							
Cooling	Water cooled units require 1/2" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F		Air cooled units require 3" (7,6 cm) air space on right, 10" (25,4 cm) above.				Requires two condensers (2183464) and two precharged line sets (2183465). (Machine has 1/2" and 3/8" couplings for connecting to line sets)	
Hopper Volume	Two - 8 gallon (30,28 liters)							
Freezing Cylinder Volume	Two - 1.33 gallon (5,03 liters)							
Accessories	Side-mounted spinner #2177877 Dual bag connection kit #2177801							

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

* Machine requires a dedicated electrical circuit per freezing cylinder.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
920-894-2293 • 800-558-5807
Fax: 920-894-7029
E-mail: foodservice@stoelting.com
www.stoeltingfoodservice.com

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-111A 04/12