


# Single Flavor Soft Serve/ Yogurt Freezer with Refrigerated Mix Storage Cabinet

0411



- Maintains high production capacity in high temperature conditions. Provides greater reliability and quieter operation with the combination of Stoelting's high efficiency evaporator system and Scroll™ compressor.
- 13,000 Btu/hr. Scroll™ Compressor, 4-Quart Freezing Cylinder Size, Refrigerated Mix Storage Cabinet holds an 8-gallon mix container, a slide-out mix shelf, and a mix pump.
- IntelliTec™ control with LCD display communicates with operator for worry-free operation.
- Mix pump injects the exact amount of air into your mix, maintaining consistent overrun to ensure maximum profitability with clean-in-place simplicity.
- Long-wearing parts offer low preventative maintenance costs.
- Energy Conservation Mode (ECM) protects product from over-agitation during slow or non-draw periods.
- Proprietary auger design gently folds mix and prevents product breakdown, producing a smoother, creamier product.
- Clear door shows visible moving product for merchandising appeal.
- Self-closing spigot eliminates waste and ensures precise portion control.
- Adjustable dispense rate for optimal product output.
- Built for consistent control of all mixes, including low-fat, low-sugar mixes.
- Ideal choice for locations where space is an issue.
- Optional bag connection system eliminates potential contamination sources.



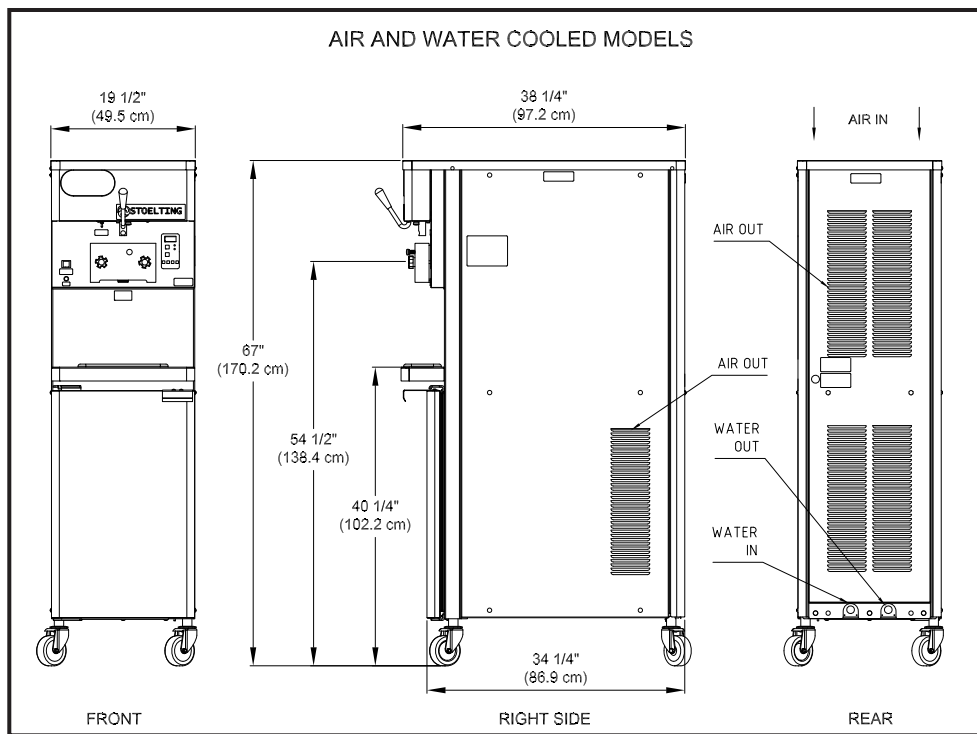

	<b>Model O411</b>	
<b>Dimensions</b>	<b>Machine</b>	<b>with crate</b>
width	19-1/2" (49,5 cm)	27" (68,6 cm)
height	67" (170,2 cm)	78" (198,1 cm)
depth	38-1/4" (97,2 cm)	48" (121,9 cm)
<b>Weight</b>	450 lbs (204,1 kg)	650 lbs (294,8 kg)
<b>*Electrical</b>	<b>1 Phase, 208-240 VAC, 60Hz</b>	
running amps	15A	
connection type	NEMA6-20P power cord provided	
<b>Compressor</b>	13,000 Btu/hr Scroll™ Compressor	
<b>Drive Motor</b>	3/4 hp	
<b>Air Flow</b>	Air cooled units require 3" (7,6 cm) air space at the back.	
<b>Plumbing Fittings</b>	Water cooled units require 1/2" N.P.T. water and drain fittings.	
<b>Hopper Volume</b>	8 gallons (30,29 liters)	
<b>Freezing Cylinder Volume</b>	1 gallon (3,79 liters)	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

\* Machine requires a dedicated electrical circuit.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600  
 920-894-2293 • 800-558-5807  
 Fax: 920-894-7029  
 E-mail: [foodservice@stoelting.com](mailto:foodservice@stoelting.com)  
[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-110 04/12